

# DOWNDRAFT SNACK CHILLER CONVERSION OVERVIEW

BEGIN BY REMOVING POWER TO THE MACHINE AND COVERING SENSITIVE COMPONENTS

KIT DESIGNED BY :  
SIMPLICOOOL




REMOVE UPPER TRAYS TO ACCESS TOP OF MACHINE \*




CUT INLET AND OUTLET AIR HOLES




INSTALL FOAM PAD OVER HOLES

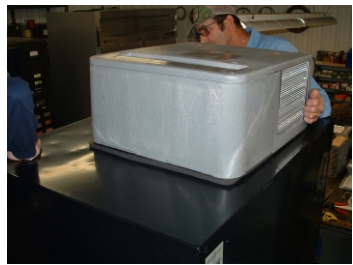


INSTALL GRS 2100D ON TOP OF PAD

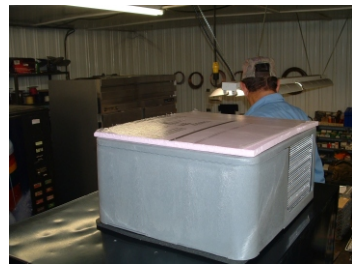

INSTALL RIGID FOAM BOARD ON TOP OF UNIT

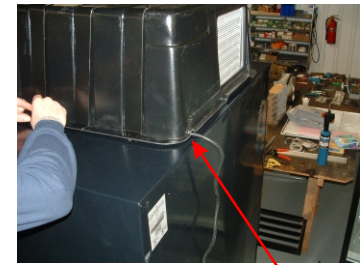

INSTALL HOLD DOWN STRAPS AND BOLTS TRAP POWER CORD UNDER STRAIN RELIEF

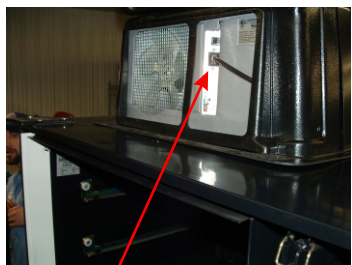

ATTACH POWER CORD TO THE UNIT AND SET THE TEMPERATURE DIP SWITCHES ( 70 DEGREES RECOMMENDED )



INSTALL FILTER IN FILTER COVER AND SNAP INTO POSITION



INSTALL AIR DEFLECTOR OVER OUTLET



CONVERSION COMPLETE. REINSTALL TRAYS AND PLUG IN UNIT.

\* FOR HIGH TEMPERATURE / HUMIDITY APPLICATIONS ALL TRAYS SHOULD BE REMOVED AND THE CABINET INSULATED WITH 1/2 INCH FOAM BOARD AVAILABLE AT LOCAL HOME STORES

FOR MORE INFORMATION ON THIS OR ANY OTHER CONVERSION USING THE GRS-2100D SYSTEM CALL :

**1-800-282-3462**



[WWW.SIMPLICOOOL.COM](http://WWW.SIMPLICOOOL.COM)